




Construction  
Metal Forming

# MetFloor® 55

## SHALLOW COMPOSITE DECKING PROFILE

The ultimate in lightweight steel decking for all multi-rise buildings

Its profile provides an excellent mechanical key into the concrete slab, offering a strong shear bond performance augmented by stiffeners located in the profile trough. MetFloor® 55 presents a virtually flat soffit and only a relatively thin slab is required to meet fire design requirements.

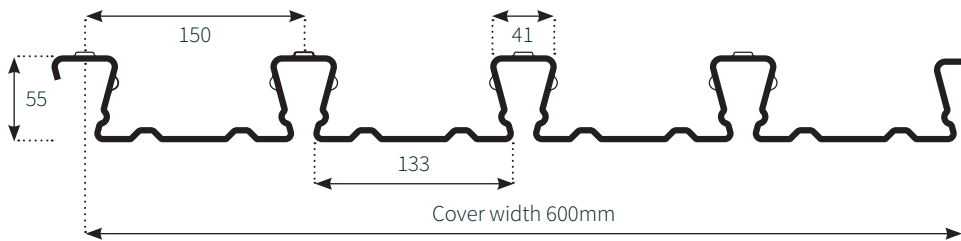

- Available in 0.9mm, 1.0mm and 1.2mm gauges
- Unpropped decking spans in excess of 3.5m can be achieved
- Thermally efficient profile, reducing heat transfer and improving fire ratings
- Up to two hour fire protection provided to top flange of composite beams
- Regular and simple connections for use with wedge nuts for suspended services
- Wide trough widths enabling flexible and efficient shear stud placement
- Available coated with a variety of metallic or organic coatings for various applications

Nominal thickness (mm)	Steel Grades (N/mm <sup>2</sup> )	Profile depth (mm)	Height of neutral axis (mm)	Profile area (mm <sup>2</sup> )	Profile weight (kN/m <sup>2</sup> )
0.9	S350	55	18	1648	0.13
1.0	S350	55	18	1840	0.15
1.2	S350	55	18	2223	0.18

METFLOOR 55 COMPOSITE SLAB - VOLUME & WEIGHT			
Slab depth (mm)	Concrete volume (m <sup>3</sup> /m <sup>2</sup> )	Weight of concrete (kN/m <sup>2</sup> ) Normal weight of concrete	
		Wet	Dry
105	0.096	2.26	2.21
110	0.101	2.38	2.33
115	0.106	2.50	2.44
120	0.111	2.61	2.56
125	0.116	2.73	2.67
130	0.121	2.85	2.79
150	0.141	3.32	3.25
200	0.191	4.50	4.40

For further information please contact CMF:

Oct 2022; v1.0



Construction Metal Forming  
Unit 3, Mamhilad Technology Park,  
Old Abergavenny Rd, Mamhilad,  
Monmouthshire, NP4 0JJ.

Customer services: 01495 761080  
Sales enquiries: 0121 389 5064  
Technical support: 0121 389 5069

e: info@cmf.uk.com | www.cmf.uk.com